


HALITE Architectural

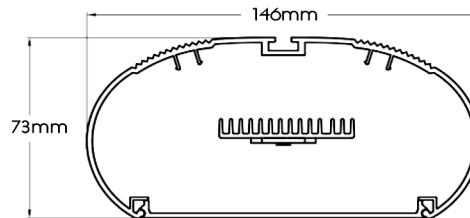

NEXUS C101

146mmWx73mm

Diffuser


Standard/High output

LED

FEATURES

Aluminium extruded continuous tubular lighting system—LED range

- Standard: White or Black PC finish, Anodised Aluminium Finish
- Scalable in 100mm segments, easy to replace modular gear trays
- High performance LED-Satin diffusers, continuous
- Suspended installation (wire or rod), Wall mounting brackets optional
- Integral Control gear 240V AC, 50-60Hz, PF>0.95, integral surge protection
- Earth Leakage current <0.25mA/driver gear tray
- SELV LED engine SO(Standard Output) or HO, custom, 3000K, 4000K, cri>80
- L90 B10 70,000hrs, L70 B10 195,000hrs, 3 Step MacAdam Ellipse
- Accessories: Spitfire, LED Emergency packs (on Board)
- Luminaire length up to 6m without joins, Easy Join system, Plug&Play
- Bends Lit or Unlit, 90deg, 135deg, other mitre
- 4.6kg/m
- Standard Warranty 7 years

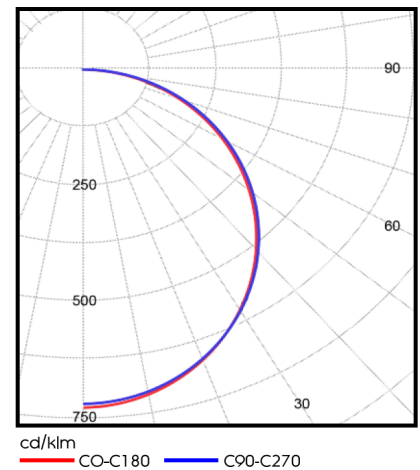

Options

- Dimming DSI/DALI
- 2700K, 5000K, 6500K optional
- Cyanosis LED, cri>90, TW, RGB, RGBW
- Optional: custom Powder Coat