



LINEARLED Circular Series



Chromatic Temp. options

Dimensions

LINEARLED LC6080 Ring


3000K, 4000K, other

60mmx80mm/DIAmm

FEATURES

Medium power Suspended aluminium (6063-T5)LED profile allowing for wide range of output:

- PC cover with smooth lighting, high transmittance, typical efficacy of the luminaire 90-100lm/W
- SS wire suspensions, aluminium end caps
- High density LED (2835) on rigid PCB, SELV, cri 80+, optional cri 90+, SDCM<5 (standard), optional SDCM<3
- White, Black P/C finish—standard (other options Silver, Gold available)
- Integral gear tray with non-flicker Driver 220-240V, 50/60Hz, PF>0.92
- Options: DALI, 0-10V dimming, Triac, Push dimming
- Ceiling Box: Power connector or Gear housing options
- Warranty offered is 5 years

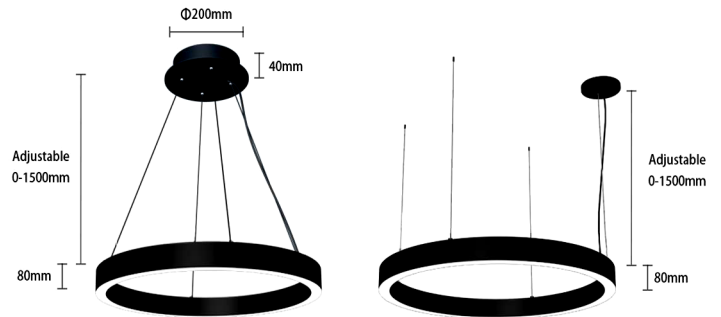

Model Number	Dimension (mm)	Color Tempertarue (Kelvin)	Input Voltage (DCV)	PF	Beam Angle	Power (W)	Current (mA)	Luminous Fluxc (lm)
LC6060-0.45M	φ450*W60*H60	3000K	220-240V 50/60Hz	>0.9	105°	20W	500mA	1800lm
		4000K						2000lm
LC6080-0.45M	φ450*W60*H80	6000K	220-240V 50/60Hz	>0.9	105°	30W	750mA	1900lm
		3000K						2700lm
LC6060-0.6M	φ660*W60*H60	4000K	220-240V 50/60Hz	>0.9	105°	40W	1000mA	3000lm
		6000K						2850lm
LC6080-0.6M	φ660*W60*H80	3000K	220-240V 50/60Hz	>0.9	105°	50W	1250mA	3600lm
		4000K						4000lm
LC6060-0.9M	φ900*W60*H60	6000K	220-240V 50/60Hz	>0.9	105°	60W	1500mA	3800lm
		3000K						4500lm
LC6080-0.9M	φ900*W60*H80	4000K	220-240V 50/60Hz	>0.9	105°	60W	1500mA	5000lm
		6000K						4750lm
LC6060-1.0M	φ1060*W60*H60	3000K	220-240V 50/60Hz	>0.9	105°	60W	1500mA	5400lm
		4000K						6000lm
LC6080-1.0M	φ1060*W60*H80	6000K	220-240V 50/60Hz	>0.9	105°	60W	1500mA	5700lm
		3000K						6000lm
LC6060-1.2M	φ1200*W60*H60	4000K	220-240V 50/60Hz	>0.9	105°	60W	1500mA	5700lm
		6000K						5700lm