



HALITE LEDSTAR

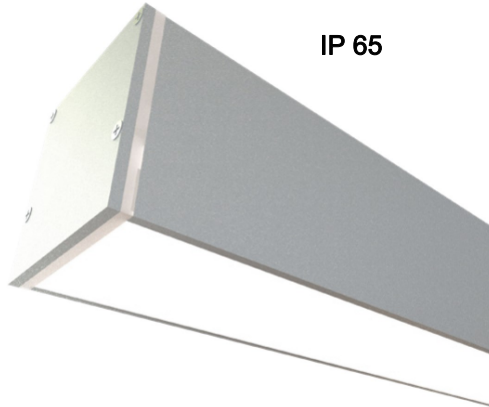

IP 65

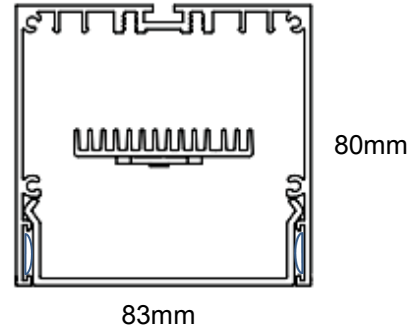

QUADRATA 80 IP

83mmx80mm

Diffuser


Standard/High output

LED

FEATURES

Aluminium extruded tubular lighting system—LED range IP55 rated

- Standard in White, Black, Anodised Aluminium Finish with Silicone gaskets
- Scalable in 100mm segments, modular gear trays Plug&Play
- PlexiLED PC diffusers, high performance
- Suspended installation (wire or rod), Wall mounting brackets optional
- Integral Control gear (ripple free) 240V AC, 50-60Hz
- Integral stand alone surge protection
- Accessories: Spitfire, LED Emergency (on Board)
- ZHAGA compliant digital, Polarised plug connections
- 3.9kg/m, lengths up to 3m without joins
- SELV LED engine, SO, HO , Custom L80 B20 80,000Hrs, 3 step MacAdam Ellipse, 3000K, 4000K
- Warranty offered 5 years

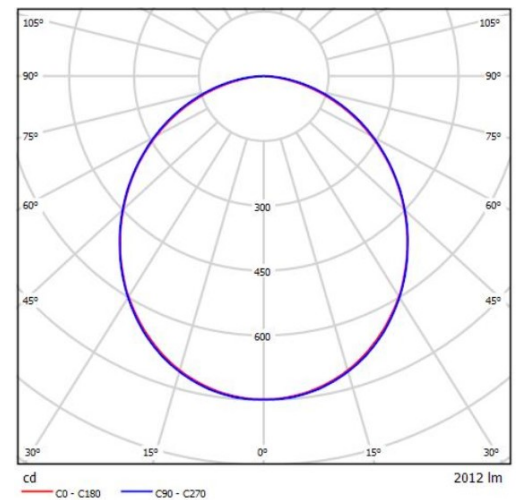

Options

- Dimming DSI/DALI
- 2700K, 5000K, 6500K optional
- Cyanosis LED, cri>90, TW, RGB, RGBW
- Optional: custom Powder Coat

Product	Output Current (mA)	Lumen Output (Lm/m)	System Power (W/m)	System Efficacy (Lm/W)
4000K CRI 80 HO	1000	3391	32.1	106
4000K CRI 80	900	3087	29.2	106
4000K CRI 80	800	2774	25.9	107
4000K CRI 80	700	2452	22.6	108
4000K CRI 80 SO	600	2013	20.1	100
4000K CRI 80	500	1716	17	101
4000K CRI 80	400	1401	14	100
4000K CRI 80	350	1237	12.4	100

Note: The above output values are 'delivered' lumens.