

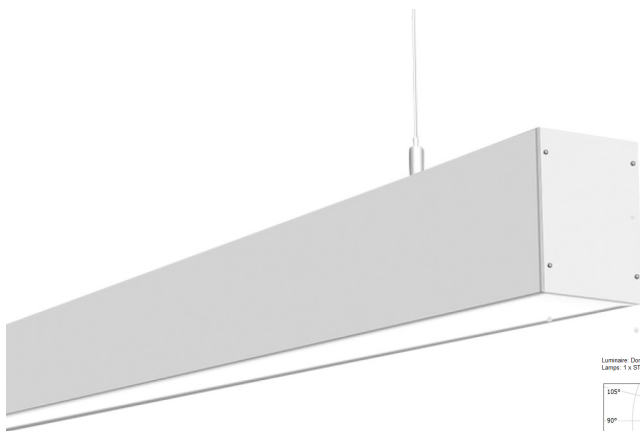



LEDLINEAR Series



Standard with smooth High Efficiency Opal PC cover diffuser

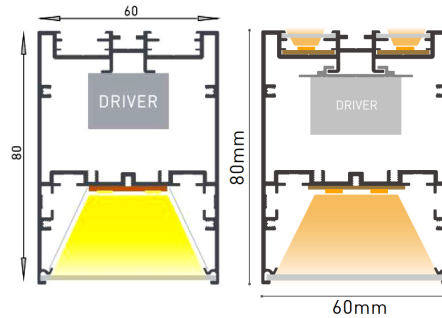


Direct




Indirect/Direct  
34%/66%


O—Opal smooth/1m, 18.4W

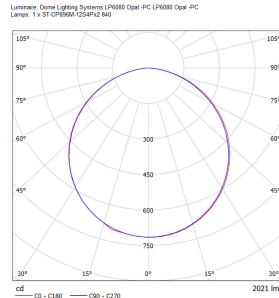

OP—Combined Opal Prism/1m, 18.4W

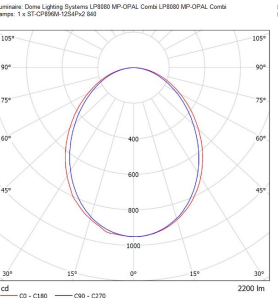

MP—2 Layer Prism (UGR19)/1m, 18.4W

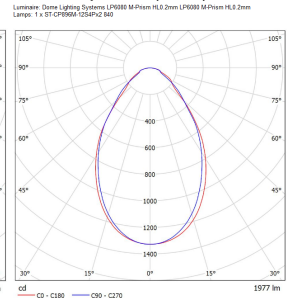

LINEARLED LP6080

14-30W/m

3000K/4000K


(LXXmm) xW60mmxH80mm

>100lm/W

FEATURES

Mid-High power Suspended aluminium (AL-6063) LED profile Direct or D/I, allowing for wide range of output with **typical efficacy of the luminaire 100-120lm/W** with diffuser options designed to meet EFSG requirements:

- **Opal smooth PC cover diffuser**
- **MP—UGR Diffuser Sheet — 2layer Prism PMMA diffuser for low UGR 19**
- **OP— Opal Prism Combined diffuser for reduced UGR (approx. 90° beam)**
- **O—Opal smooth PC cover diffuser—105°deg**
- Ultra reflective side walls for high efficiency
- LED cri>80, optional cri 90+, SDCM 4, optional SDCM 2
- **LM-80-2008 and TM-21:** Reported L90>36,000HRS (L90, Tc=55C, ) (Average Lumen Maintenance 98.88% at 6000Hrs at 85°C
- **Included Wire suspensions**, surface mounting brackets
- screwed aluminium end caps, (optional screw less)
- White, Black, Silver standard finishes
- Complex shapes with mitre joins available
- Integral gear tray with non-flicker Driver 200-265V, pf>0.92, Class 1, efficiency >90%
- Warranty 5 years



MP—2 Layer Prism (UGR19)



OP—Combined Opal Prism for reduced UGR

OPTIONS

- LED strip light source (cri, CCT 5000K)
- Custom lengths
- dimming (DALI, 0-10V, Triac)
- other colour finishes (MOQ/surcharge may apply)



DOME LIGHTING SYSTEMS

T: 02 9659 3571  
M: 0407 107 513  
sales@dslighting.com.au

We reserve the right to make technical and design changes.

Edition: 05/21