

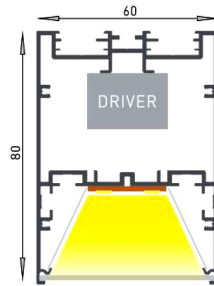


LEDLINEAR Series

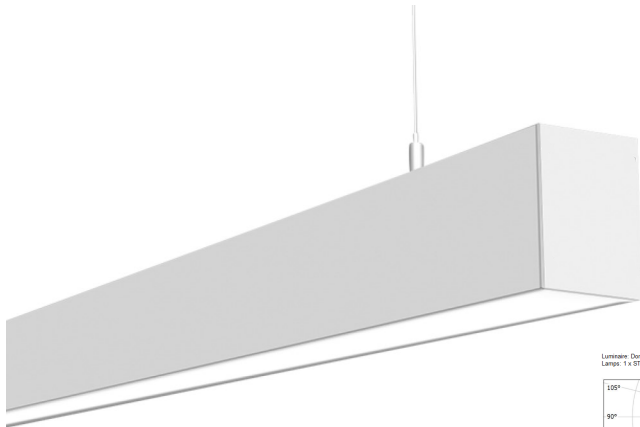


Standard with smooth High Eff Opal PC cover diffuser (Type O)


O—Opal smooth/1m, 18.4W
Luminaire: Dome Lighting Systems LP6880 Opal-PC LP6880 Opal-PC
 Lamp: 1 x ST-CP6880M 1254P/2 840

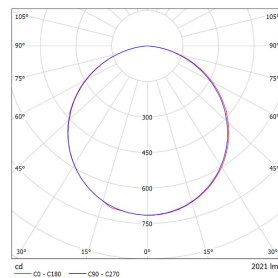

OP—Combined Opal Prism/1m, 18.4W
Luminaire: Dome Lighting Systems LP6880 MP-OPAL Combi LP6880 MP-OPAL Combi
 Lamp: 1 x ST-CP6880M 1254P/2 840

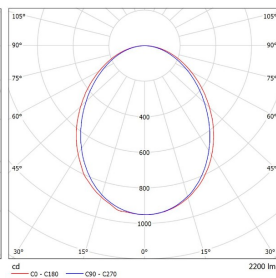

MP—2 Layer Prism (UGR19)/1m, 18.4W
Luminaire: Dome Lighting Systems LP6880 M-Prism H.0.2mm LP6880 M-Prism H.0.2mm
 Lamp: 1 x ST-CP6880M 1254P/2 840

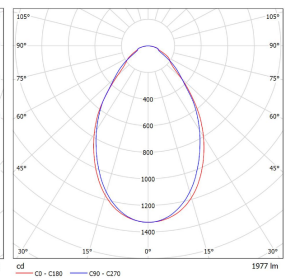


LINEARLED LP6080 S 14-30W/m 3000K/4000K (LXXmm) xW60mmxH80mm >100lm/W

FEATURES

Mid-High power Suspended aluminium (AL-6063) LED profile Direct or optional D/I, allowing for wide range of output with **typical efficacy of the luminaire 100-120lm/W** with diffuser options designed to meet EFSG requirements:

- **Opal smooth PC cover diffuser**
- **MP—UGR Diffuser Sheet — 2layer Prism PMMA diffuser for low UGR 19**
- **OP— Opal Prism Combined diffuser for reduced UGR (approx. 90° beam)**
- **O—Opal smooth PC cover diffuser—105°deg**
- Ultra reflective side walls for high efficiency
- LED cri>80, optional cri 90+, SDCM 3, optional SDCM<2
- **LM-80-2008 and TM-21:** Reported L90>36,000HRS (L90, Tc=55C,) (Average Lumen Maintenance 98.88% at 6000Hrs at Tc85°C), projected to > 50,000HRS L70
- **Included Wire suspensions**
- screwed aluminium end caps, (optional screw less)
- Powder coated White, Black, Silver as standard finishes
- Complex shapes with mitre joints available
- Integral gear tray with non-flicker Driver 200-265V, pf>0.92, Class 1, efficiency >90%
- Warranty 5 years

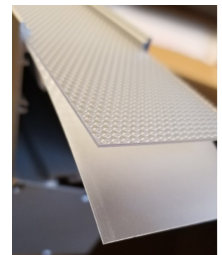

MP—2 Layer Prism (UGR19)



OP—Combined Opal Prism for reduced UGR

OPTIONS

- LED strip light source (cri, CCT 5000K)
- Custom lengths
- dimming (DALI, 0-10V, Triac(phase dimmers))
- other colour finishes (MOQ/surcharge may apply)

