

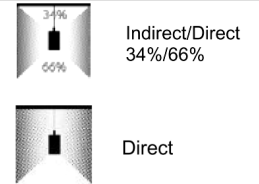



LINEARLED Series

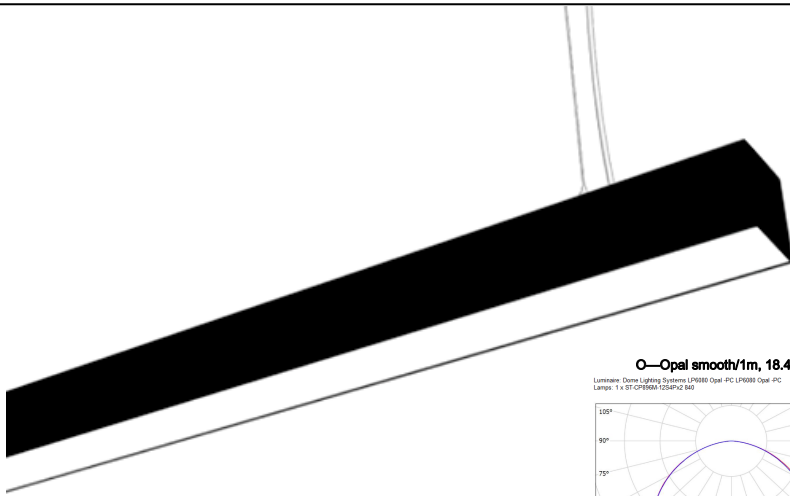


Standard with smooth High Efficiency Opal PC cover diffuser


O—Opal smooth/1m, 18.4W
Luminaire: Dome Lighting Systems LP8080 Opal-PC LP8080 Opal-PC
Lamps: 1 x ST-CP8580M 125SPx2 840

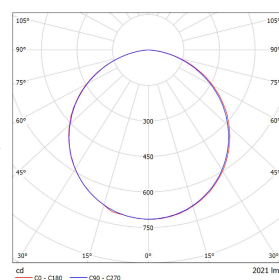

OP—Combined Opal Prism/1m, 18.4W
Luminaire: Dome Lighting Systems LP8080 MP-OPAL Combi LP8080 MP-OPAL Combi
Lamps: 1 x ST-CP8580M 125SPx2 840

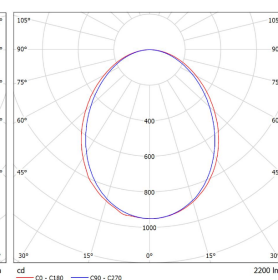

MP—2 Layer Prism (UGR19)/1m, 18.4W
Luminaire: Dome Lighting Systems LP8080 M-Prism H.L.0.2mm LP8080 M-Prism H.L.0.2mm
Lamps: 1 x ST-CP8580M 125SPx2 840

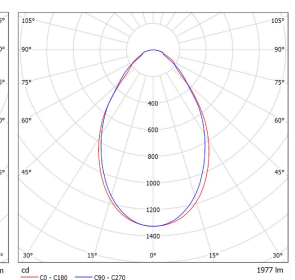

LINEARLED LP8080 DI



3000K/4000K/other

(XXX) x W80mm x 80mm

FEATURES

Mid-High power Suspended aluminium (AL-6063) LED profile Direct or D/I, allowing for wide range of output with typical efficacy of the luminaire 100-120lm/W with diffuser options designed to meet EFSG requirements:

- Opal smooth PC cover diffuser
- MP—UGR Diffuser Sheet — 2layer Prism PMMA diffuser for low UGR 19
- OP— Opal Prism Combined diffuser for reduced UGR (approx. 90° beam)
- O—Opal smooth PC cover diffuser—105°deg
- Ultra reflective side walls for high efficiency
- LED cri>80, optional cri 90+, optional SDCM 3
- **LM-80-2008 and TM-21:** Reported L90>36,000HRS (L90, Tc=55C,) (Average Lumen Maintenance 98.88% at 6000Hrs at 85°C
- **Included Wire suspensions**, surface mounting brackets
- screwed aluminium end caps, (optional screw less)
- White, Black, Silver standard finishes
- Complex shapes with mitre joins available
- Integral gear tray with non-flicker Driver 200-265V, pf>0.92, Class 1, efficiency >90%
- Warranty 5 years

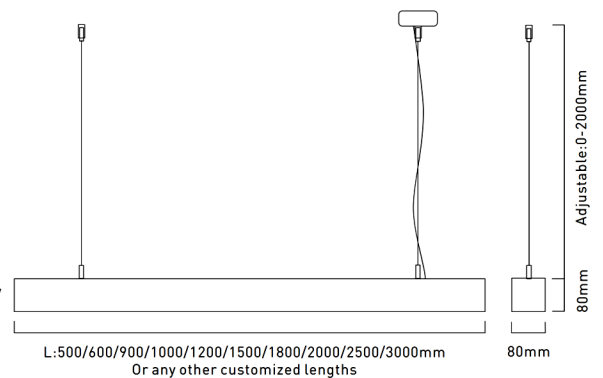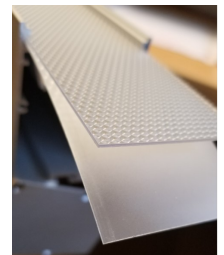

OPTIONS

- LED strip light source output
- Custom lengths and module sets
- dimming (DALI, 0-10V)
- other colour finishes (MOQ applies)

