




survivor 1.0 classic surface

IK10+

IP66

AT06

PRE

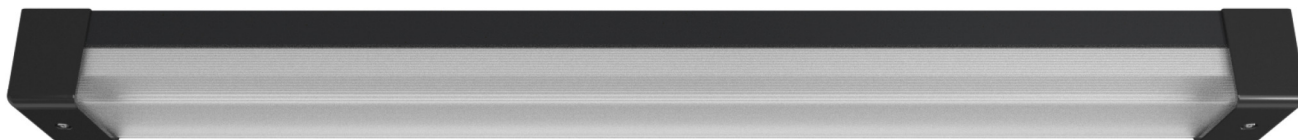

warranty

5 years as standard, up to 10 years on request

lengths

standard 700 | 1000 | 1200 | 1500 | 1800 mm [nominal]
additional options plug 'n' play integrated lighting systems | made-to-measure

led driver [premium]

interface non-dim | dali-2 | bluetooth [casambi] | microwave sensor
rated life >100,000 hrs
min ambient temp -25 °C
max ambient temp 60 °C
tc point max 75 °C

led module

cri >80 | >90
cct 3000k | 4000k | tunable white
lumen maintenance >72,000 hrs [L80 B10]
min ambient temp -40 °C
max ambient temp 65 °C
tc point max 85 °C

mounting base

material heavy gauge extruded aluminium
standard finishes black textured power coat | white gloss powder coat
additional finishes non-standard powder coat colours | warranty powder coat [up to 35 years]

light module

material 4mm extruded polycarbonate [uv stabilised]
finish clear reeded





survivor 1.0 classic surface

IK10+

IP66

AT06

PRE

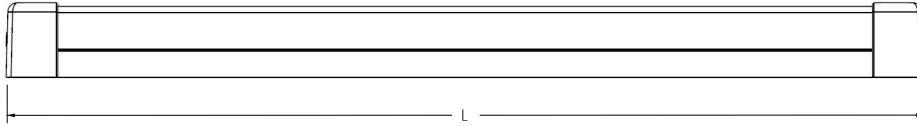

| dimensions [mm] | L | W | H |
|-----------------|-------|-----|-----|
| 0700 | 690 | 110 | 100 |
| 1000 | 970 | 110 | 100 |
| 1200 | 1,250 | 110 | 100 |
| 1500 | 1,530 | 110 | 100 |
| 1800 | 1,810 | 110 | 100 |

| 44 led module | | 10 | | 15 | | 20 | | 25 | | 30 | | 35 | | 40 | |
|---------------|-----|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|
| | | lumens | watts | lumens | watts | lumens | watts | lumens | watts | lumens | watts | lumens | watts | lumens | watts |
| 0700 | 830 | 550 | 5 | 830 | 7 | 1,090 | 9 | 1,340 | 12 | 1,570 | 14 | 1,820 | 17 | 2,090 | 19 |
| | 840 | 580 | 5 | 870 | 7 | 1,150 | 9 | 1,410 | 12 | 1,650 | 14 | 1,920 | 17 | 2,200 | 19 |
| 1000 | 830 | 830 | 7 | 1,240 | 10 | 1,640 | 14 | 2,020 | 18 | 2,360 | 21 | 2,730 | 25 | 3,130 | 29 |
| | 840 | 870 | 7 | 1,300 | 10 | 1,720 | 14 | 2,120 | 18 | 2,480 | 21 | 2,870 | 25 | 3,300 | 29 |
| 1200 | 830 | 1,110 | 9 | 1,650 | 14 | 2,190 | 19 | 2,690 | 23 | 3,150 | 28 | 3,640 | 33 | 4,180 | 38 |
| | 840 | 1,170 | 9 | 1,730 | 14 | 2,300 | 19 | 2,830 | 23 | 3,310 | 28 | 3,830 | 33 | 4,390 | 38 |
| 1500 | 830 | 1,390 | 11 | 2,060 | 17 | 2,730 | 23 | 3,360 | 29 | 3,930 | 35 | 4,550 | 42 | 5,220 | 48 |
| | 840 | 1,460 | 11 | 2,170 | 17 | 2,870 | 23 | 3,530 | 29 | 4,140 | 35 | 4,790 | 42 | 5,490 | 48 |
| 1800 | 830 | 1,660 | 14 | 2,480 | 21 | 3,280 | 28 | 4,030 | 35 | 4,720 | 42 | 5,460 | 50 | 6,270 | 58 |
| | 840 | 1,750 | 14 | 2,600 | 21 | 3,450 | 28 | 4,240 | 35 | 4,960 | 42 | 5,750 | 50 | 6,590 | 58 |

| 66 led module | | 10 | | 15 | | 20 | | 25 | | 30 | | 35 | | 40 | |
|---------------|-----|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|--------|-------|
| | | lumens | watts | lumens | watts | lumens | watts | lumens | watts | lumens | watts | lumens | watts | lumens | watts |
| 0700 | 830 | 830 | 7 | 1,240 | 10 | 1,640 | 14 | 2,020 | 18 | 2,360 | 21 | 2,730 | 25 | 3,130 | 29 |
| | 840 | 870 | 7 | 1,300 | 10 | 1,720 | 14 | 2,120 | 18 | 2,480 | 21 | 2,870 | 25 | 3,300 | 29 |
| 1000 | 830 | 1,250 | 10 | 1,860 | 15 | 2,460 | 21 | 3,030 | 26 | 3,540 | 32 | 4,100 | 37 | 4,700 | 43 |
| | 840 | 1,310 | 10 | 1,950 | 15 | 2,590 | 21 | 3,180 | 26 | 3,720 | 32 | 4,310 | 37 | 4,940 | 43 |
| 1200 | 830 | 1,660 | 14 | 2,480 | 21 | 3,280 | 28 | 4,030 | 35 | 4,720 | 42 | 5,470 | 50 | 6,270 | 58 |
| | 840 | 1,750 | 14 | 2,600 | 21 | 3,450 | 28 | 4,240 | 35 | 4,960 | 42 | 5,750 | 50 | 6,560 | 58 |
| 1500 | 830 | 2,080 | 17 | 3,100 | 26 | 4,100 | 35 | 5,040 | 44 | 5,900 | 53 | 6,830 | 62 | 7,840 | 72 |
| | 840 | 2,190 | 17 | 3,250 | 26 | 4,310 | 35 | 5,300 | 44 | 6,200 | 53 | 7,180 | 62 | 8,240 | 72 |
| 1800 | 830 | 2,500 | 20 | 3,710 | 31 | 4,920 | 42 | 6,050 | 53 | 7,080 | 64 | 8,200 | 75 | 9,400 | 86 |
| | 840 | 2,620 | 20 | 3,900 | 31 | 5,170 | 42 | 6,360 | 53 | 7,440 | 64 | 8,620 | 75 | 9,890 | 86 |